TIER 1

UNDERGROUND INJECTION CONTROL
PERMIT APPLICATION

Ute Tribal # 08-12
2100' FSL & 515' FWL
Sec. 8, T5S-R3W
Duchesne County, Utah
API # 43-013-31164

July 2015

Prepared for:
Bruce Suchomel
Groundwater Program, Mail Code 8P-W-UIC
U.S. Environmental Protection Agency
1595 Wynkoop St
Denver, CO 80202-1129

Prepared by:
Petroglyph Energy, INC.
960 Broadway Avenue, Suite 500, P.O. Box 70019
Boise, Idaho 83707
(208) 685-7600
FAX (208) 685-7605

LIST OF ATTACHMENTS

Attachment No. 1	Area Topography Map
Attachment No. 2	Site Map
Attachment No. 3	Map of the A-Marker surface
Attachment No. 4	Cross-Sections of the injection formation
Attachment No. 5	Water Analysis
Attachment No. 6	Completion data for all wells in the AOR
Attachment No. 7	CBL for the UIC well
Attachment No. 8	Open hole log for the UIC well
Attachment No. 9	List of owners and Affidavit Notification
Attachment No. 10	Well bore diagrams for the UIC well
Attachment No. 11	P&A procedure
Attachment No. 12	MIT procedure
Attachment No. 13	Surety Bond letter

SUMMARY DOCUMENT
UIC WELL APPLICATION
Ute Tribal 08-12
API # 43-013-31164

The following document contains information provided in support of the application for the conversion of the Ute Tribal 08-12 well to an injection well in the Green River formation in the Antelope Creek Field in Duchesne County, Utah.

The Antelope Creek Field falls within the Uintah and Ouray Indian reservations and is within Indian Country; therefore, for facilities located on the reservation, only EPA-issued UIC permits are necessary for compliance with UIC regulations.

The EPA has issued an Area Permit #UT20736-00000 for the Underground Injection Control for the Antelope Creek Field. This area permit allows for additional producing wells to be converted to injection wells for enhanced recovery.

(1) Petroglyph Energy, Inc. (Petroglyph) is the operator and only working interest owner of wells located in the Antelope creek Field, Duchesne County, Utah. Petroglyph's business address is provided below:

Petroglyph Energy, Inc.
960 Broadway Avenue, Suite 500
P.O. Box 70019
Boise, ID 83707

(2) Enclosed as Attachment No. 1 is a topographic map of a portion of the Antelope Creek Field, identifying all wells located in this area. The legal location for the Ute Tribal 08-12 is 2100' FSL & 515' FWL NW/SW Sec. 8, T5S-R3W.

(3) Attachment No. 2 is a map of the well. This map shows a circle with a ¼ mile radius centered on the Ute Tribal 08-12 well. The ¼ mile radius encompasses the area of review, AOR, within which Petroglyph is required to investigate all wells for mechanical integrity. The ¼ mile radius also identifies mineral ownership; all lands within the AOR are leased to Petroglyph by the Ute Tribe as indicated by yellow shading. The AOR has Ute Tribal 07-09, and Ute Tribal 08-05 well(s) located in its ¼ mile radius.

(4) Petroglyph proposes to utilize the Ute Tribal 08-12 as an injection well for enhanced recovery in the Antelope Creek Field.

(5) Injection Zone – The injection intervals are between 3759' and 5739' True Vertical Depth and located in the lower portion of the Green River Formation. The injection zone is confined within a 1980' section between the Green River "A" Lime marker bed and the top of the Basal Carbonate in the lower part of the formation. The injection zone is composed of lenticular calcareous sandstones interbedded with low permeable carbonates and calcareous shales. The lenticular sandstones vary in thickness from 1 to 30 feet.

Confining Zone – The overall confining strata above the injection zone consists of impermeable Green River calcareous shales and continuous beds of microcrystalline dolostone. The confining zone in the Ute Tribal 08-12 is 398 feet thick.

Attachment No. 3 is a structure map of the A-Marker surface.

Attachment No. 4 is a cross-section of the injection interval and confining zone.

(6) Enclosed as Attachment No. 5 are standard analyses of produced water from three batteries that currently serve as central handling facilities for all project producing wells. The analysis of the Green River formation water from the Ute Tribal 18-08 Satellite Battery is 12805 mg/L of total dissolved solids (TDS), Ute Tribal 21-11 Satellite Battery is 15659 mg/L TDS, and Ute Tribal 34-12-D3 Satellite Battery is 14590 mg/L TDS.

Injectate in the field is a mixture of produced water and fresh make-up water. The nearest injection well is the Ute Tribal 07-09, the most recent analysis of the water being injected into the Green River formation at this location is 10392 mg/L TDS. This analysis is also included in Attachment No. 5.

(7) A summary of completion data from the Ute Tribal 08-12 and offset wells in the AOR are included in Attachment No. 6

(8) The cement bond log is included in Attachment No. 7.

(9) The open hole log for the Ute Tribal 08-12 is included in Attachment No. 8.

(10) The Antelope Creek Field is operated under a Cooperative Plan of Development between the Ute Tribe and Petroglyph Energy. At the Ute Tribal 08-12 location, all mineral owners, surface owners and operators located within the AOR ¼ mile radius have been notified of the submitted EPA application to convert to injection. Attachment No. 9 is the Affidavit of Notification to all owners.

(11) Petroglyph requests a maximum surface injection pressure of **1772**psi. The EPA Area Permit No. UT20736-00000 uses the formula:

Pm = (0.88psi/ft - 0.43psi/ft(Sg)) D

Where:
Pm = Maximum surface injection pressure
0.88psi/ft = Fracture gradient
D = Top perforation depth
0.43psi/ft = Hydrostatic pressure/hydraulic head
Sg = Specific gravity of injection fluid

For the Ute Tribal 08-12:
1772psi = (0.88psi/ft - 0.43(1.00)) 3937ft

(12) Three wellbore diagrams for the Ute Tribal 08-12 are in Attachment No. 10. One diagram is for production, one for injection, and one for Plug & Abandonment (P&A).

(13) The P&A procedure for this well is shown in Attachment No. 11.

(14) Once the draft permit is issued, Petroglyph will conduct a Mechanical Integrity Test and a static bottom-hole pressure test. The MIT procedure is contained in Attachment No. 12. The conversion work will be satisfactorily completed and submitted to the EPA on Form 7520-12. A wellbore schematic will be included with this form.

(15) Petroglyph will give proof of financial responsibility by posting a surety bond for the UIC well prior to final permit approval. A copy of this letter is contained in Attachment No. 13.

(16) Petroglyph will install various gauges on the well so that the injection pressure and tubing/casing annulus pressure can be monitored. The well will be equipped with a flow meter with a cumulative volume recorder.

ATTACHMENT NO. 1:
AREA MAP

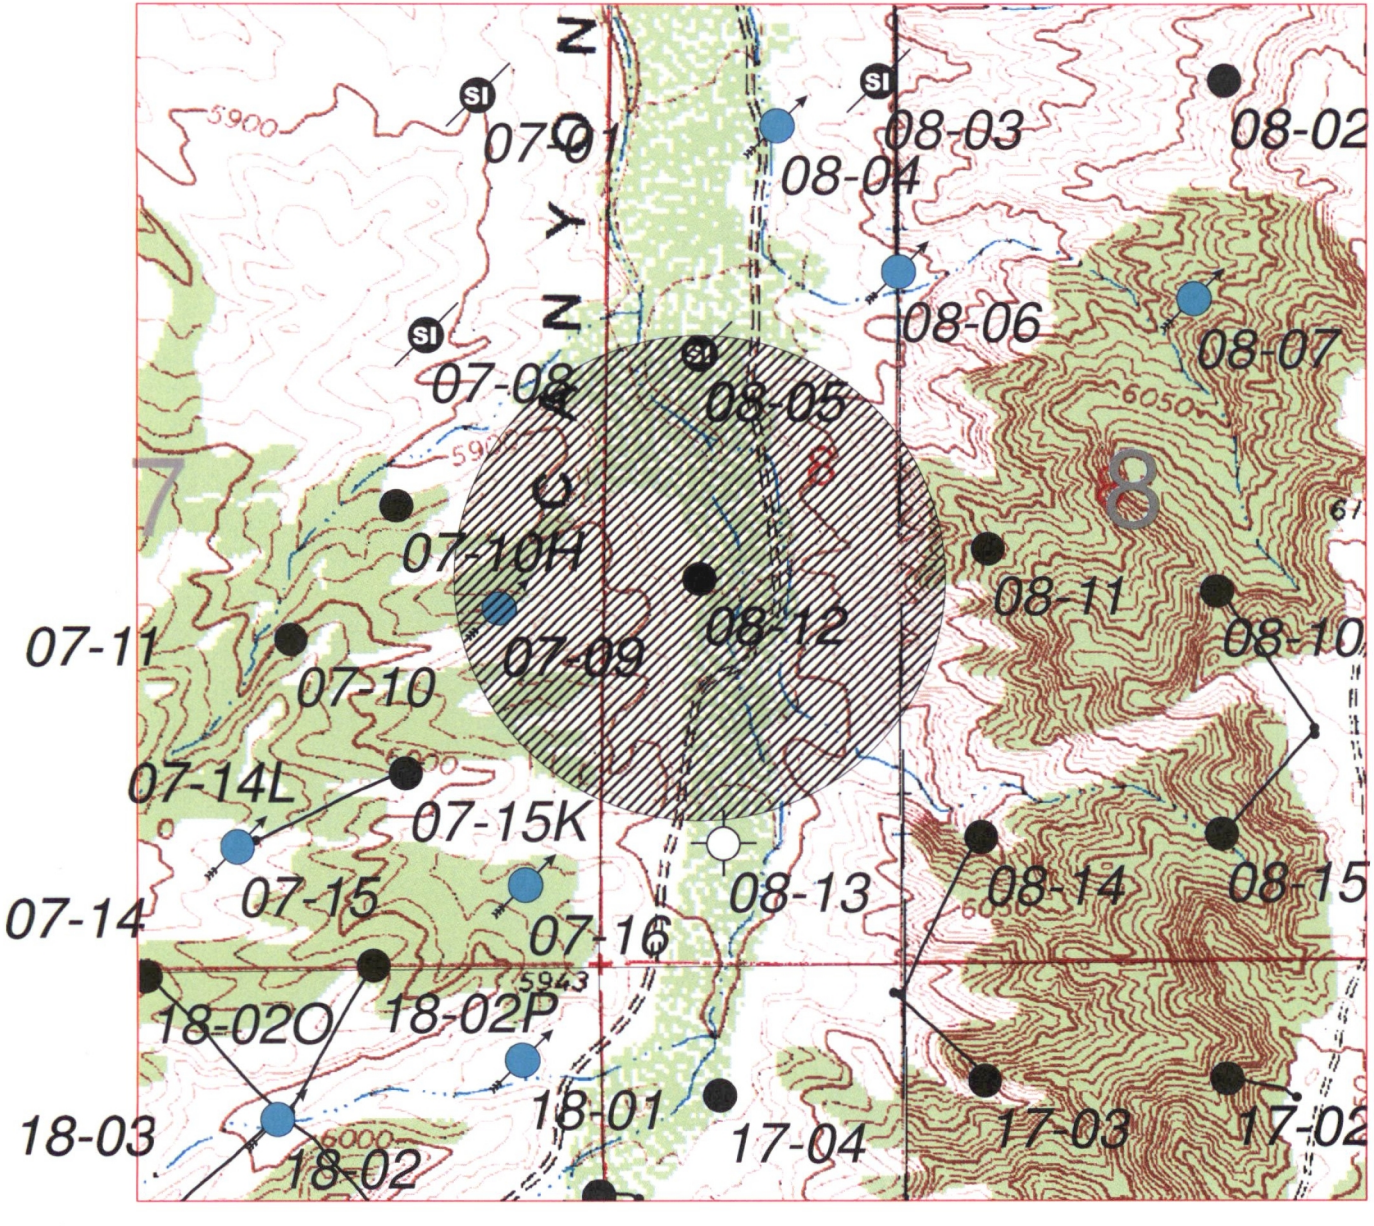

1:12000

500 0 500 1000 ft

1 inch = 1000 feet

- Producing Oil Well
- Injection Well
- Injection Well, waiting on water
- PTPI
- D & A
- Waiting on Completion
- TA
- Shut In
- Injector Shut In
- P & A
- Shut In Gas Well

PETROGLYPH

ANTELOPE CREEK

DUCHESNE COUNTY, UTAH

Ute Tribal 08-12 Area Map

Hack 9-15-06

Revised by:
JG 3/24/15

Petroglyph Energy, Inc.; 960 Broadway Ave. Suite 500 PO Box 70019 Boise, ID 83707

\\PEI-GEO\Utah Regional\CTI\ 08-12 area map.gmp

ATTACHMENT NO. 3:
Map of the "A" Lime Marker

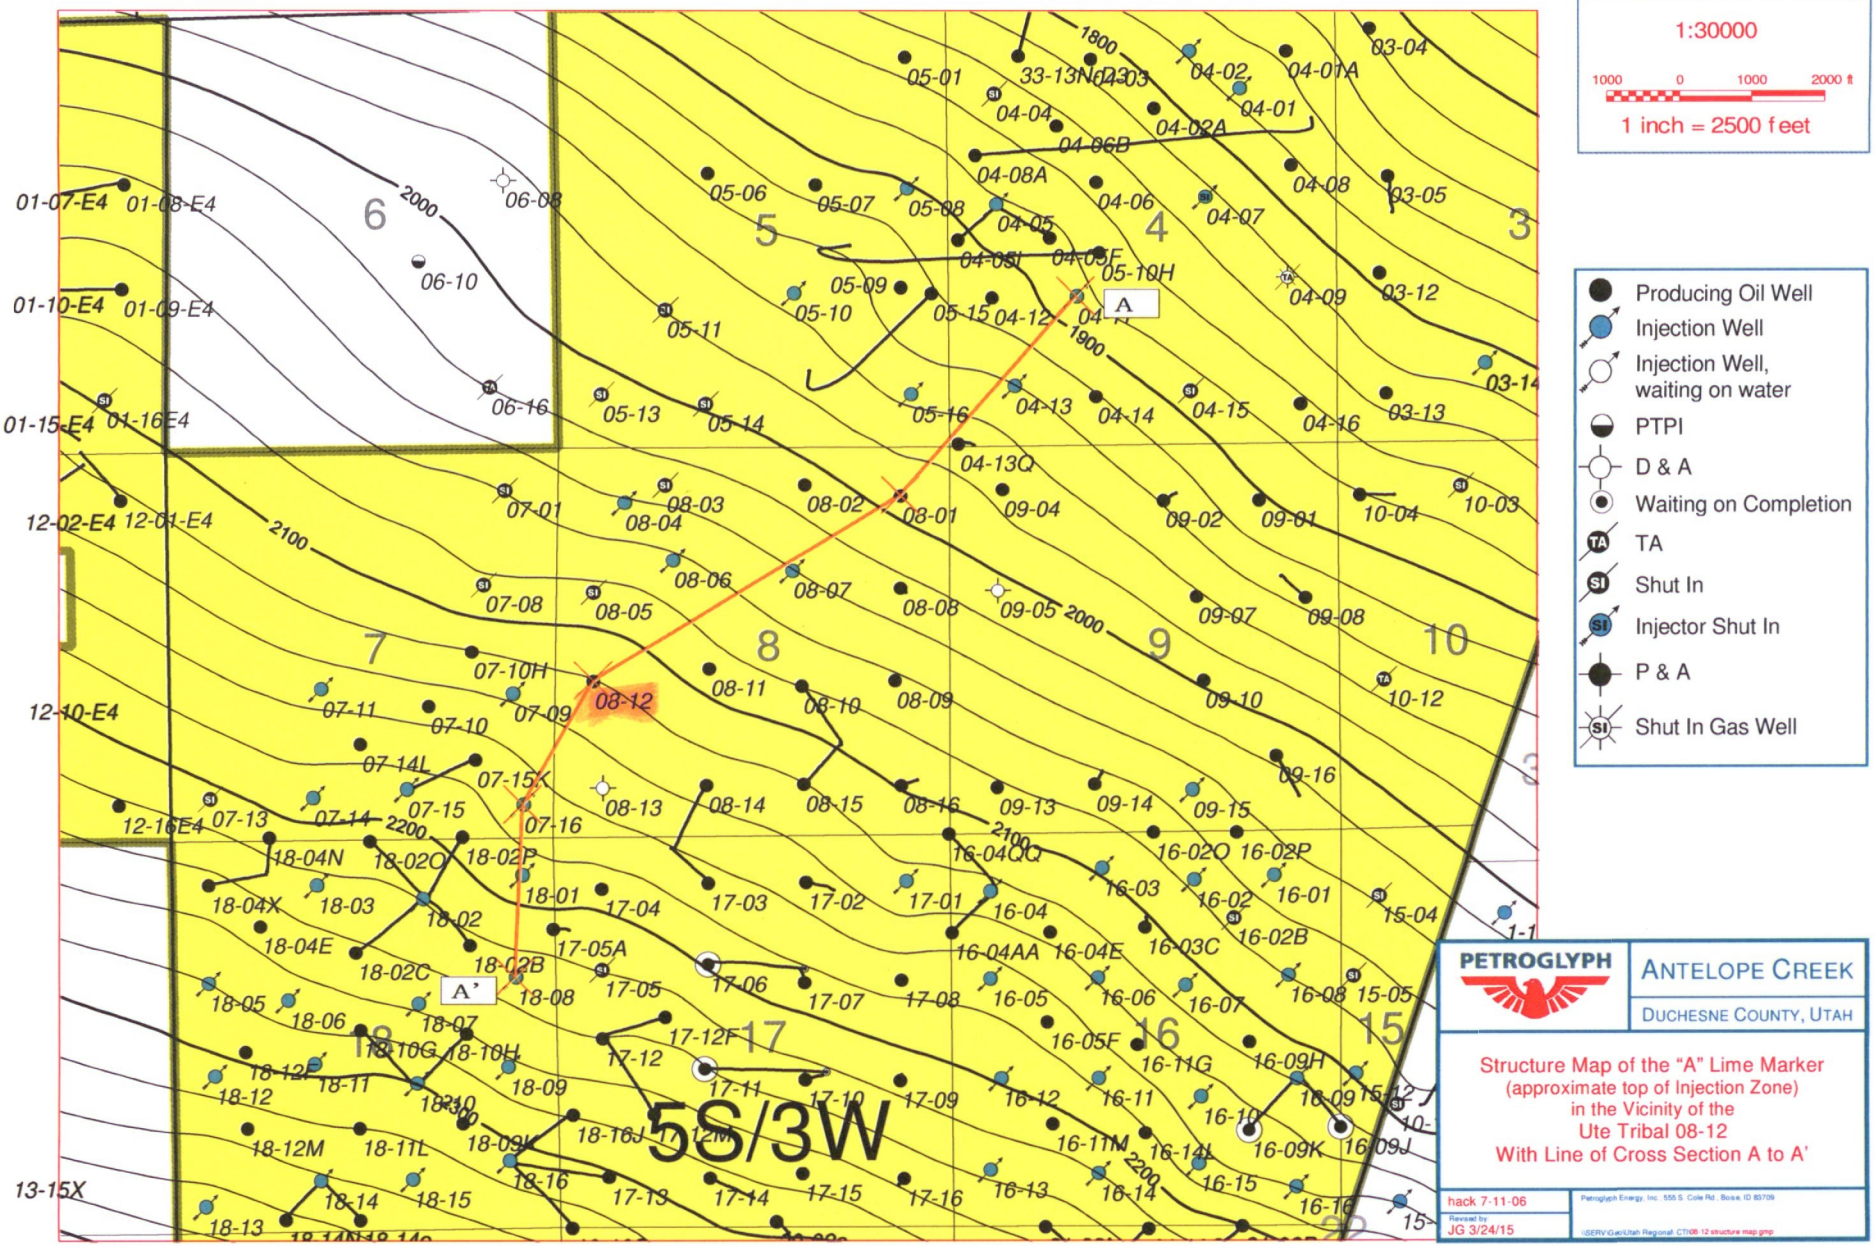

Structural Cross Section A to A' in the Vicinity of Ute Tribal 08-12

43013308780000	3584 ft	43013315680000	4856 ft	43013311640000	1919 ft	43013314630000	2337 ft	43013308810000
PETROGLYPH OPERATING COMPANY INC Ute Tribal 04-11 1999 FSL 1738 FWL TWP: 5 S - Range: 3 W - Sec. 4		PETROGLYPH OPERATING COMPANY INC Ute Tribal 08-01 660 FNL 660 FEL TWP: 5 S - Range: 3 W - Sec. 8		PETROGLYPH OPERATING Ute Tribal 08-12 2100 FSL 515 FWL TWP: 5 S - Range: 3 W - Sec. 8		PETROGLYPH OPERATING COMPANY INC Ute Tribal 07-16 440 FSL 410 FEL TWP: 5 S - Range: 3 W - Sec. 7		PETROGLYPH OPERATING COMPANY INC Ute Tribal 18-08 1929 FNL 612 FEL TWP: 5 S - Range: 3 W - Sec. 18

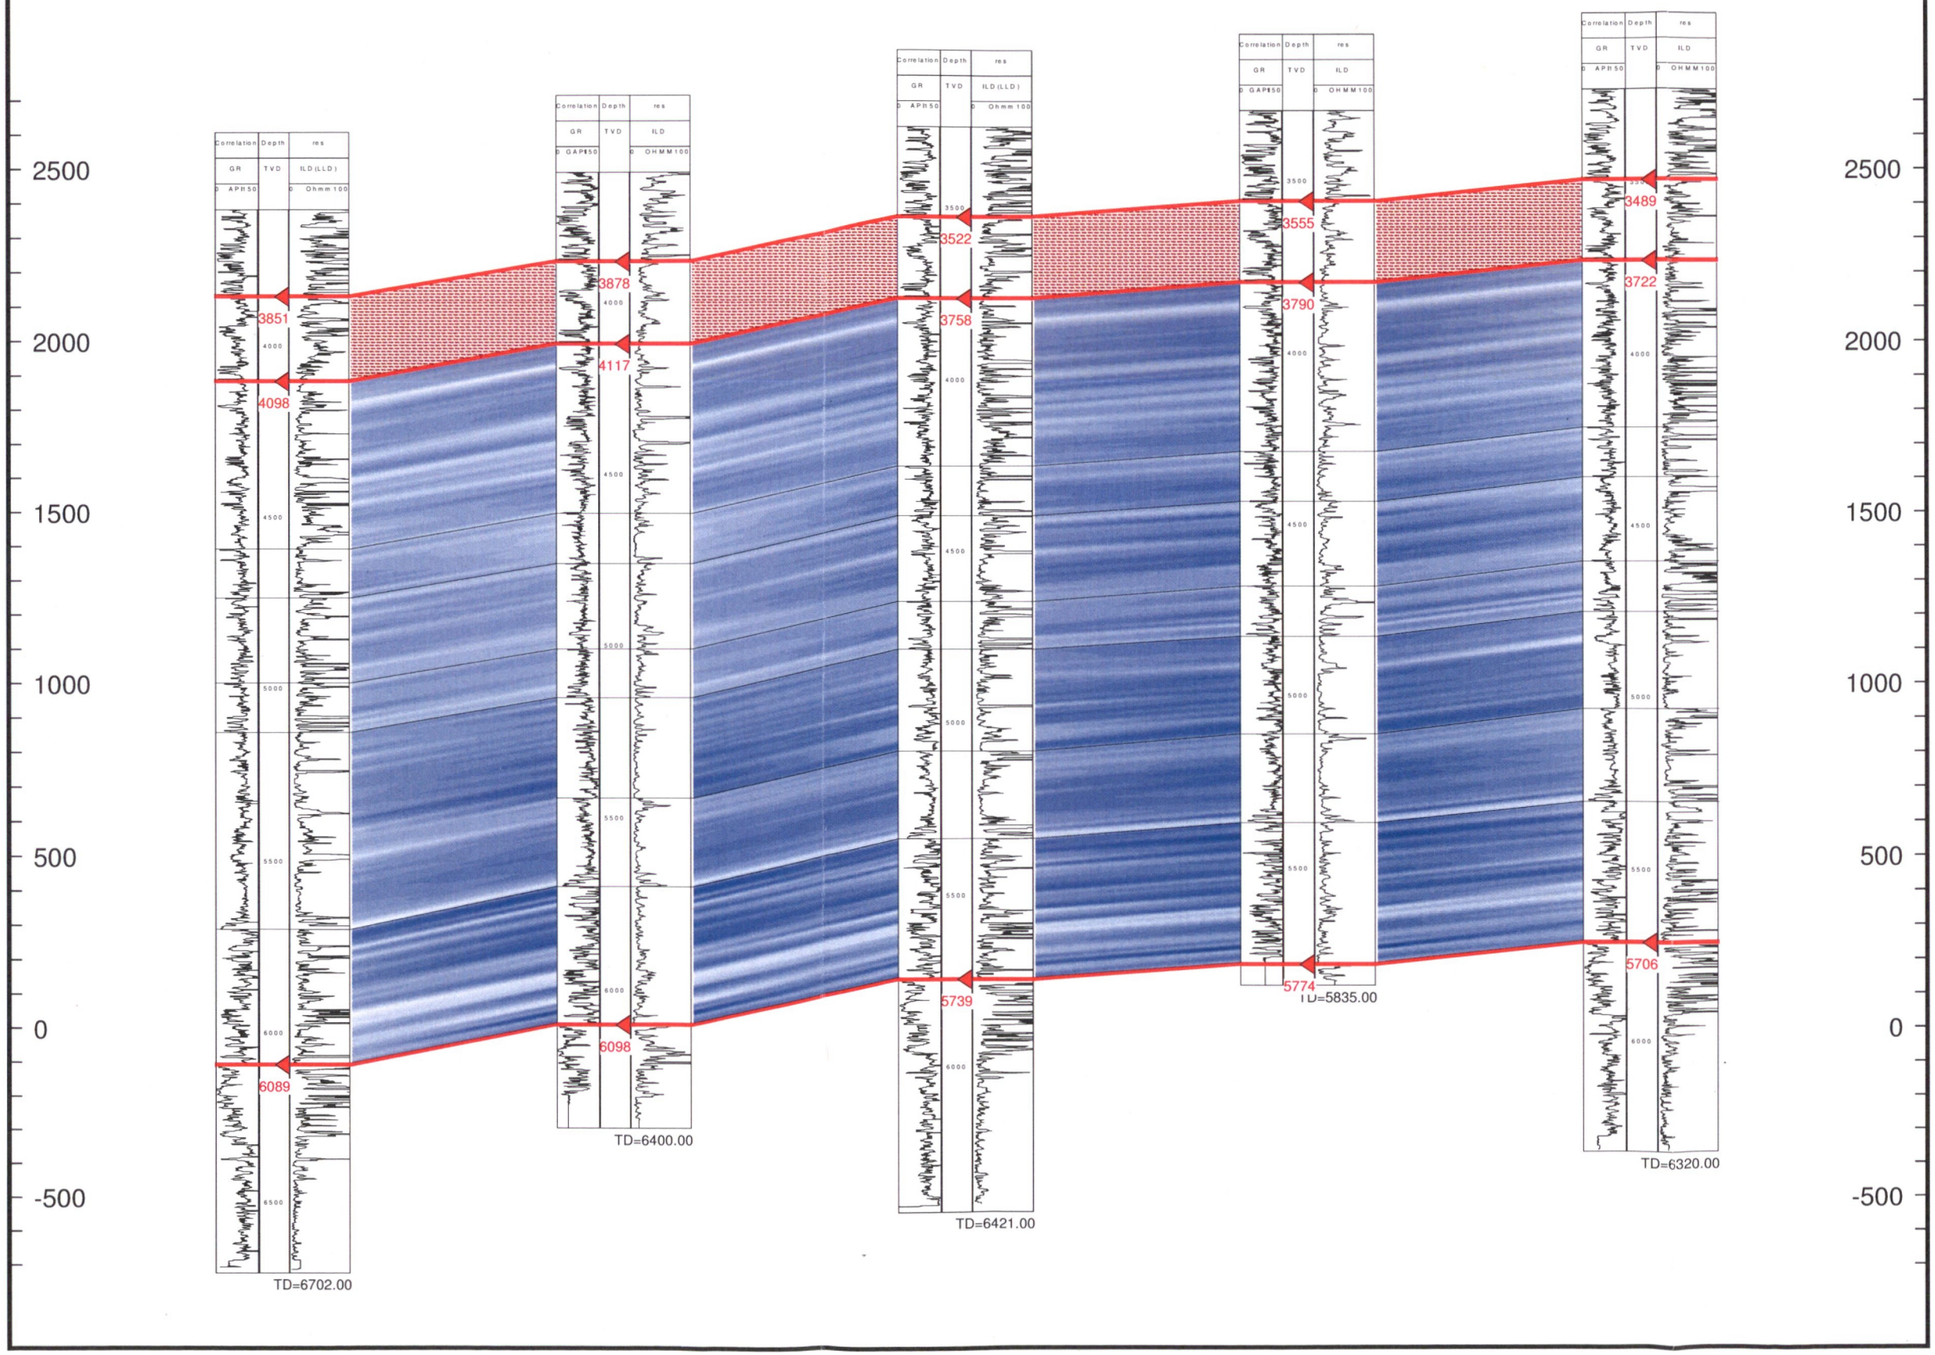

API- 43-013-1164

~~Newfield Production~~ - Technical Review Worksheet

Permit No: UT2 . Well: UTE TRIBAL 08-12

What Needs to be Done	Information Sources	Review & Evaluation Notes
Determine name, top and base of the confining zone(s) and the injection zone(s).	❑ Geologic data submitted ❑ Well logs from area ❑ Published articles	Conf Zone: top 3522 base 3758 Inj Zone: top 3758 (Garden Gulch 2-Marker) base 5739 (top Wasatch)
Determine name, top and base of all USDWs. List base of lowermost USDW: Determine which USDWs are actually being used for water supply.	❑ Geologic data submitted ❑ nearby Water analyses ❑ nearby Well logs ❑ Water supply wells ❑ Published articles	Surface Elevation: 5866 KB 5881 ~~Pub #92~~ base USDW: bgs: elev: submitted base USDW ~~bgs~~ KB: 881 elev: base of Uinta / top Green River: 1090
Review and evaluate construction, casing and cementing records of proposed well.	❑ Data submitted ❑ Completion/workover reports ❑ Contractor invoices ❑ Logs: CBL, RTS, Temp, casing inspection, etc.	TD: 6421 PBTD: surface csg 8 5/8" ft 0-285 sx long strg csg 5.5" ft 0-5923 sx TOC: submitted : 2450 CBL log: 2445 amplitude hard to read. Swell?
Review and evaluate construction, casing and cementing records of AOR wells that penetrate injection zone.		Wells in AOR: TD TOC CA 8-12 6144 930 8-05 6436 SURF
Review P&A plan for effective USDW protection, injection zone isolation and well closure.	❑ P&A plan ❑ Area geology	plug depths:
Review amount of FR - is it adequate to cover P&A costs of proposed in P&A plan?	❑ contractor bids / P&A cost histories ❑ nearby well P&A costs	FR instrument: Amount: $
Calculate the maximum allowable injection pressure (MAIP).	❑ Fracture treatments ❑ Step Rate Test results ❑ Fracture gradient	top perforation: 3937 bottom perforation: 5546 injectate specific gravity: 1.01 Frac Gradient: .88 psi initial MAIP = 1660 psi
Determine which logs and tests will be performed.		

Ute Tribal 08-12 Well History

Well History:

Spud Well: 11/17/1986

Completed: 12/23/1986

First Production: 12/23/1986

Tops (KB):

BMSW* Found at 881'

Green River 1090'

A Marker 3759'

X Marker 4246'

Douglas Creek 4391'

B Limestone 4782'

Castle Peak 5296'

Basal Carbonate 5739'

Perf History

12/21/1986

D05	4943' to 4945'	E04.2	5536' to 5541'
D7	5008' to 5012'		
D7	5028' to 5031'		
D7	5041' to 5043		
E01.2	5393' to 5396'		
E02.1	5424' to 5433'		
E03.3	5487' to 5493'		

4/13/1988

C05.2	4490' to 4498
C08.1	4656' to 4665'
C08.2	4678' to 4686'

4/29/2011

B06	3937' to 3946'	D7 (reperf)	5028' to 5034'
B08.1	4089' to 4091'	D7 (reperf)	5041' to 5047'
B10	4144' to 4164'	E01.2	5378' to 5382'
C05.2 (reperf)	4492' to 4499'	E01.2	5390' to 5399'
C08.1 (reperf)	4660' to 4666'	E02.1 (reperf)	5424' to 5439'
C08.2 (reperf)	4678' to 4686'	E03.3	5486' to 5494'
D05 (reperf)	4943' to 4949'	E04.2 (reperf)	5536' to 5546'
D7 (reperf)	5008' to 5022'		

Petroglyph Operating Co., Inc.

Ute Tribal #08-12

(2100' FSL & 515' FWL)

NW SW Section 8, 5S- 3W

Antelope Creek Field

Duchesne Co. Utah

API#: 43013311640000

*Plate 1 Utah Geological Survey Special Study 144. (2012). *BMSW Elevation Contour Map, Uinta Basin, Utah.* [map]. (CA 1:200,000)

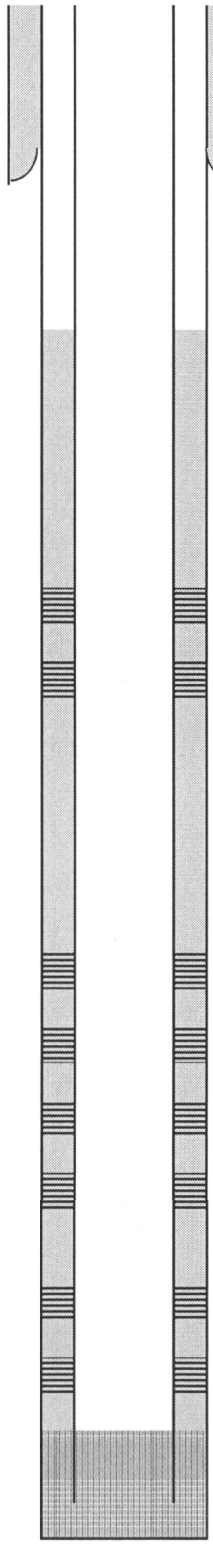

(Not to Scale)

GL: 5866'

KB: 5881'

8 5/8" 24# 25' CSG @ 285' KB

cmt'd w/250 sx

Surface Hole size 12 1/4"

Cement top @ 2450'

5 1/2" 15.5# J-55 CSG @ 5923'

cmt'd w/1375sx

2670 good cmt

Hole Size 7 7/8" bit

Perf's:

B06 3937' to 3946'

B08.1 4089' to 4091'

B10 4144' to 4164'

C05.2 4492' to 4499'

C08.1 4660' to 4666'

C08.2 4678' to 4686'

D05 4943' to 4949'

D7 5008' to 5022'

D7 5028' to 5034'

D7 5041' to 5047'

E01.2 5378' to 5382'

E01.2 5390' to 5399'

E02.1 5424' to 5439'

E03.3 5486' to 5494'

E04.2 5536' to 5546'

PBTD @ 5815' KB

TD @ 6420' KB

Ute Tribal 08-12 Injection

Well History:

Spud Well: 11/17/1986

Completed: 12/23/1986

First Production: 12/23/1986

Tops (KB):

BMSW* Found at 881'

Green River 1090'

A Marker 3759'

X Marker 4246'

Douglas Creek 4391'

B Limestone 4782'

Castle Peak 5296'

Basal Carbonate 5739'

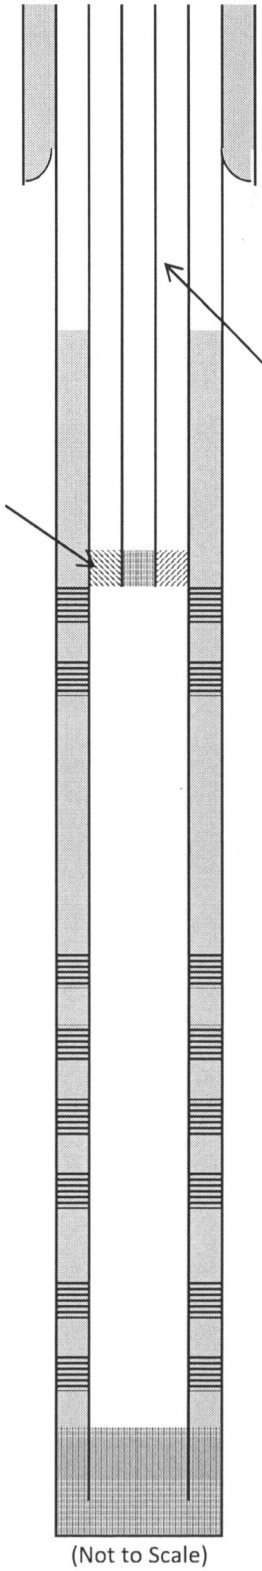

GL: 5866'

KB: 5881'

8 5/8" 24# 25' CSG @ 285' KB

cmt'd w/250 sx

Surface Hole size 12 1/4"

Cement top @ 2450'

5 1/2" 15.5# J-55 CSG @ 5923'

cmt'd w/1375sx

Tubing 2 7/8" 6.5# J55

Hole Size 7 7/8" bit

Perf's:

B06 3937' to 3946'

B08.1 4089' to 4091'

B10 4144' to 4164'

C05.2 4490' to 4499'

C08.1 4656' to 4666'

C08.2 4678' to 4686'

D05 4943' to 4949'

D7 5008' to 5022'

D7 5028' to 5034'

D7 5041' to 5047'

E01.2 5378' to 5382'

E02.1 5424' to 5439'

E03.3 5486' to 5494'

E04.2 5536' to 5546'

Petroglyph Operating Co., Inc.

Ute Tribal #08-12

(2100' FSL & 515' FWL)

NW SW Section 8, 5S- 3W

Antelope Creek Field

Duchesne Co. Utah

API#: 43013311640000

*Plate 1 Utah Geological Survey Special Study 144. (2012). *BMSW Elevation Contour Map, Uinta Basin, Utah.* [map]. (CA 1:200,000)

(Not to Scale)

PBTD @ 5815' KB

TD @ 6420' KB

Ute Tribal 08-12 Plug and Abandonment

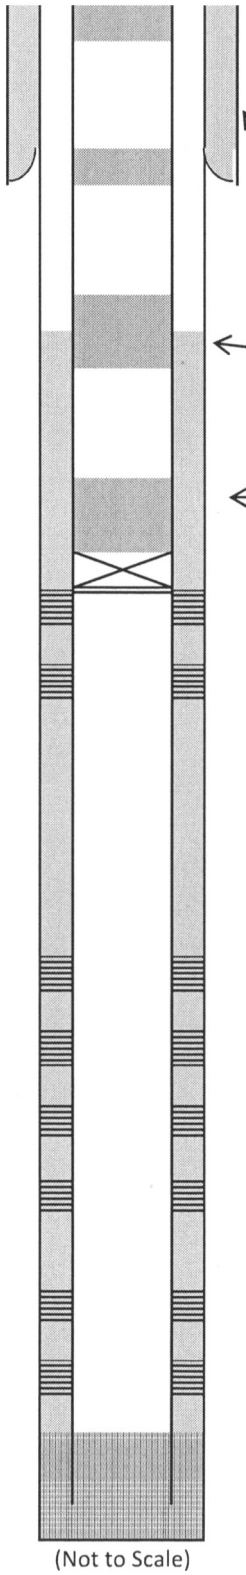

8sx Class G Cement-50' plug

15sx Class G Cement-100' plug

30sx Class G Cement-200' plug

30sx Class G Cement-200' plug

CIBP @ 3847'

GL: 5866'

KB: 5881'

8 5/8" 24# 25' CSG @ 285' KB

cmt'd w/250 sx

Surface Hole size 12 1/4"

Cement top @ 2450'

5 1/2" 15.5# J-55 CSG @ 5923'

cmt'd w/1375sx

Hole Size 7 7/8" bit

Perf's:

B06 3937' to 3946'

B08.1 4089' to 4091'

B10 4144' to 4164'

C05.2 4490' to 4499'

C08.1 4656' to 4666'

C08.2 4678' to 4686'

D05 4943' to 4949'

D7 5008' to 5022'

D7 5028' to 5034'

D7 5041' to 5047'

E01.2 5378' to 5382'

E02.1 5424' to 5439'

E03.3 5486' to 5494'

E04.2 5536' to 5546'

Petroglyph Operating Co., Inc.

Ute Tribal #08-12

(2100' FSL & 515' FWL)

NW SW Section 8, 5S- 3W

Antelope Creek Field

Duchesne Co. Utah

API#: 43013311640000

*Plate 1 Utah Geological Survey Special Study 144. (2012). *BMSW Elevation Contour Map, Uinta Basin, Utah.* [map]. (CA 1:200,000)

(Not to Scale)

PBTD @ 5815' KB

TD @ 6420' KB

Maximum Allowable Injection Pressure (MAIP)
From Fracture Gradient

Date: 08/26/2015 *Operator:* **Petroglyph**

Well: **Ute Tribal 08-12**

Permit #:

Enter the following values:

Specific Gravity of injectate =	**1.010**	g/cc
Depth to top of injection interval =	**3,758**	feet
Fracture Gradient (F G) =	**0.880**	psi/ft

MAIP = **1,660** psig

(rounded down to nearest 5 psig)

where:

*MSIP = [FG - (0.433 * SG)] * Depth to top of injection interval =* *1663.554*